Secdt. II-27—37,604—12-11-45.

DEV (1948) Department.

MS SERIES.

G.O. No. 1486

Dated 24-3-48.

[Despatch Abstract.]

Gentlemen - Secretariat - G.S.F. College Electricity's quarters - Leakage on roofs - Repairs - Expenditure Sanctioned

INDUSTRIES AND COMMERCE DEPARTMENT

No.3709-D1/47 dated 3rd March '48

From

The Joint Director of Industries and Commerce, Chepauk, Madras.

To

The Secretary to Government, Development Department, Madras.

Sir,

Sub:- Industries - Sericulture - Government Silk Filature, Kollegal Chowkidara quarters - leakage in roofing repairs - sanction fof expenditure requesting.

The Sericulture Expert, Government Silk Filature, Kollegal has reported that the roofing of the Chowkidars quarters at the Government Silk Filature, Kollegal requires immediate repairs as it is leaky and the inmates find it very difficult to live in them. I enclose an estimate for Rs.350 for the execution of the repairs. Centage charges at 16⅔% of the estimate which works out to Rs.42/- is also chargeable as the repairs work has to be supervised by the construction section. It is proposed to remove the old pot tiles and retile it with 25% of new tiles with lime morter borders and to execute minor repairs to flooring, walls etc. I request that Government may be pleased to sanction an expenditure of Rs.392/- for repairing the roofing tbthe chowkidars quarters in the Government Silk Filature, Kollgeal.

The expenditure is debitable to working expenses of the Filatures.

For Joint Director of Inlusties and Commerce

MA/4-3

2.

G.O.Ms 1486 dt 24/3/54
Madras

Report to accompany the estimate for "repair to the roof of the two blocks of the Chowrikidais quarters in the Govt Silk Filature - Kollegal -

Amount of estimate Rs 350/-

The estimate is prepared as per letter no 3034-E/47 dated 30.1.1948 from the Sericultural Expert Kollegal. As the existing roof of Country pot tile over Cuddapah Reapers & Country wood rafters is said to be leaky during the rains, it has been proposed to remove the pot tile from the roof and retile it with an addition of 25% of new pot tile with new lime mortar beorders A lump sum provision of Rs 20/- is made for petty repairs needed such as patch pointing flooring & walls wherever necessary

The rates are the Current P.W.D Schedule of rate

in force for this locality 39

Lt. Ramsay
SNO Surveyor

Estimate Detailed Measurement Sheet 110/5

Name of Work:- Repairs to the Chowkidars Quarters 2 blocks - @ S.F Kowegal

Details of Work	Number	Measurement in feet Length	Breadth	Depth	Area or Contain	Total For one Block.
1.) Removing pot tiles from the roof	2	27-4½		14-0	767	1/ 1/
Total						= 780
2.) Retiling the roof & forming lime mortar beardes 9"x 6"x 2" at 6" intervals 3/4 area of the roof		767 x 3/4			575	1/ 1/Sqft
Total						= 580
3). Best tiled roofing with pot tile & lime mortar beardes 9"x 6"x 2" at 6" intervals: 1/4 area of the roof		767 x 1/4 =			192	Sqft
Total						= 200
4) Repairs to the Flooring & plaster plastering &c						2-8

Ex. Engineer
Sub Superviser

6/41

Data

Quantity	Description of work	S.I No.	Rate per	Amount	Total
	1) Removing pot tile from the roof 100 sft.				
1/2 no	Brick layer 2nd class		2 4 - each	1 2 -	
3/4	Man Cooly		1 1 6 "	0 13 2	
	Sundries			0 - 10	
			total rate -	2 0 -	2'
	2) Refixing with pot tiles & flooring lime mortar boarders 9"x6"x2" at 6' intervals				
4 cft	Lime mortar		4710 - 100 ft	1146	
1/4 no	Brick layer 2nd class		24 - each	213 -	
no	Man Cooly		116 "	116	
4	Women Coolies		10 6	210 -	
4 c/ft	Sand carted 1/2 to 1 mile C.T.		5746 100 ft	- 310	
2 cft	Lime carted 1/8 to 1/2 mile		1039	- 33	
	Sundries			- 111	
			total	9 - -	9
	3) Best tiled roofing with pot tile & lime mortar boarders over existing rafters				
1450 no	Pot tile		2c 1000 no	29 - -	
4 cft	Lime mortar		4710 - 100 ft.	1146	
1/4 no	Brick layer 2nd class		24 - each.	213 -	
1 no	Man cooly		116	116	
4	Women coolies		- 10 6	210 -	
4 c/ft	Sand carted 1/2 to 1 mile C.T.		5146 100 ft	- 310	
2 cft	Lime carted 1/8 to 1/2 mile		1039 "	- 33	
1450 no	Sundries pot tile carted 1/2 miles		- 13 - 1000	- 1 210	
	Sundries			- 11	
			total	392 -	392

Mr. Mahathy
Asst. Engineer

Abstract of Estimate

Name of work: Repairs to the roof of the two blocks of Chowkidar Quarters in T.S.P. Kowegal

Quantity	Description of work	Rate	per	Amount	Total
		Rs.		Rs.	
780 Sqft	1) Removing pot tile from the roof	2	100 Sqft	16 -	
580 Sqft	2) Retiling with pot tile & fixing new country tiles 9"x6"x2" at 6" intervals	9		52 -	
2 Nos	3) Best tiled coating with pot tile & new ordinary tiles 9"x6"x2" at 6" intervals	392	Sqft	78	
18	4) Repairs to the flooring & plastering	18		20	
				166	
	Contingencies & Petty Supervision Charges			9	
	Total			175	

8/

43 Pot.

Total for one block — 175

for 2 Blocks — 175

Total Rs — 350 — 350/-

25/2/48

Ex. Engineer

Asst Engineer

Please note
Dy 24/3/48

Date. Initials.

DRAFT FOR APPROVAL.

187-89
30/3

Dev Dept (DI)

C.F. 16. 9

SUBJECT:— Industries — Sericulture - Government Silk Filatures, Kollegal - Chowkidars quarters. - Leakage in roofing - Repairs - Expenditure - Sanctioned

When received for fair copying ..
When copied ..
When examined ..
When signed ..
When despatched.

READ AGAIN ....., dated ..... 19.....

" " ..... " ..... 19.....

READ *ALSO*:—

Ltr from CF No. E2966/DI/48 From the DZ Dte., No. 3705/DZ(4) dated 3/3/1948

" " " " " " 19.....

" " " " " " 19.....

Order ~~Resolution~~ Ms. No. 1486 dated 24.3.48 19.....

No Govt permit the DZ Dte to incur an expenditure not exceeding Rs 392/- (Rupees three hundred and ninety-two only) towards repairs to the Chowkidar's quarters at the Govt Silk Filature, Kollegal. The work should be taken up in 1948-49.

2. The expenditure should be debited to "Working Expenses of the Filatures"

To the DZ Dte 24/3/48
AS through Fin
D/- 24/3/48
Dy to S.F. 4a
dd 26/3/48

CPR 13.3.48

Note. The DZ Dte's letter at P/1 of may be perused. Subject to Govt's orders a draft order is submitted

above for approval. It may be sent to P.W.D & Finance for acceptance

DD 16/3/48
9/3/48

CPL
13.3.48

P.W.D | Fin

Dev no. No
P.W.D (C.) 279/57 DE/est
12-3-48

To AS

The draft order overleaf may be accepted and the file passed on to Fin. Dept.

17/3 ust Fin

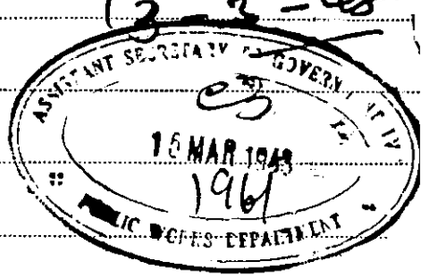

SS
16.3.48 SS/16/3

Finance (Expd) P.W.D no 1961C/48.

The Sr. SDE's letter at page 1 C/F and the report accompanying 17.3.48 the estimate at pages 3-4 C/F may be perused.

2/ In the circumstances explained, the draft order on page 1 above may be ~~passed~~ approved. Presumably the work is to be carried out during the current year itself.

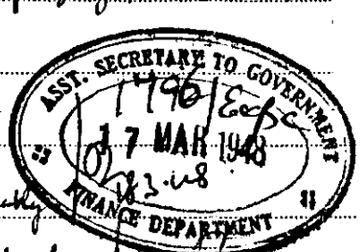

As the expenditure relates only to repair work, the case need not be circulated to SDE (Fin) and Hon'ble the Revenue Member.

CPL
15.3.48

Dy
18/3/48

Dev. Dept.

18.3.48

I agree with the addition that the work should be taken up in 1948-49.

CPL 24.3.48

To DS

33464 DE/est Fin no. 1796/Exp C
20/3/48

Development Dept.

Proposals of the Finance Deptt above may be perused in view of their presumption at B above it does not appear possible for the repairs to be carried out before 31-3-48. With reference

The presumption at B/Finance is not correct as it is not possible to get the repairs to be carried out before

[Issued as G.O No 1486 Dev Dt 24-3-48] Pg 4 ante